OFFICE CONTAINERS

40FT OFFICE CONTAINER + MEETING ROOM

SKU ARK-OF40-MTG | 40ft | Used Grade A | Ready stock | © Copyright No. 000289812

PURCHASE PRICE

Rp 82,000,000

MONTHLY RENTAL

Rp 8,000,000/mo

Up to 7% off for 12-month rentals

External dimensions	12.19 × 2.44 × 2.59 m
Internal dimensions	12.03 × 2.35 × 2.39 m
Capacity	8–10 people
Lead time	Ready to ship in 7–10 working days

A 40ft office container with a partition separating an open-plan work area from a meeting room. Two access doors, four windows and two AC brackets make this unit comfortable for larger project teams.

Widely used as the main office for infrastructure projects, as a mine-site office, or as a temporary office during building renovations.

SPECIFICATIONS

Frame	Original container frame + galvanized hollow-section reinforcement
Exterior wall	Corrugated steel plate (corten steel) 1.6–2.0 mm
Interior wall	PVC wall panels / GRC board, painted finish
Insulation	50 mm glass wool + aluminum foil
Ceiling	PVC panels + LED downlights
Floor	18 mm marine plywood + vinyl
Door	Steel panel door + mortise lock
Window	5 mm glass, aluminum frame + security grille
Electrical installation	2,200 VA, 2 MCB groups, 8 power sockets, LED lights
Paint	Anti-rust epoxy primer + PU topcoat

FEATURES & INCLUSIONS

- 2 separate rooms (gypsum partition)
- 2 steel panel doors
- 4 windows + security grilles
- 2 outdoor AC unit brackets
- 8 LED light points
- Full wall & roof insulation

Excludes 11% VAT & delivery. Prices may change without notice. Final prices are stated in our official quotation.

© Site Office Container 40 Feet · Copyright registered with DGIP Indonesia, No. 000289812

VIEW ONLINE
www.containermodifikasi.co.id/en/catalog/kantor-container-40ft

DIMENSION DRAWING

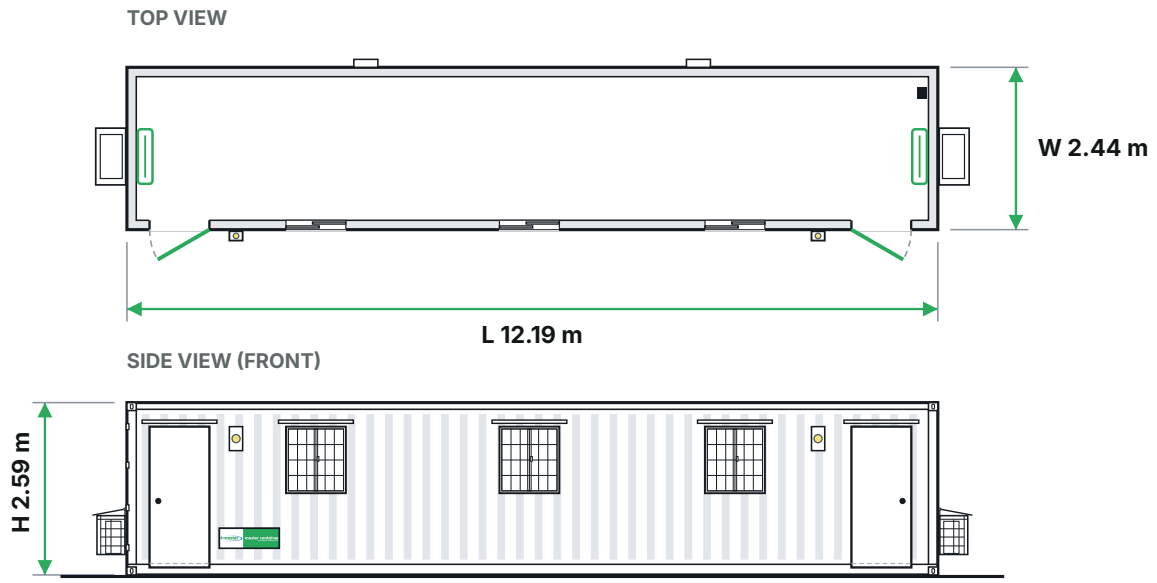

2 doors, 3 windows, 2 indoor AC units, 2 outdoor AC units, 1 MCB panel, 2 exhaust fans, 2 ship lamps — Standard outer dimensions; door, window & fitting positions can be adjusted.

© This design is protected by copyright law. Copying, producing or reproducing it without written permission is prohibited.

ADD-ONS (OPTIONAL)

ADD-ON	BUY	RENT/MO
1 HP Split AC (unit + installation)	**Rp 4,750,000**	Rp 350,000
2 HP Split AC (unit + installation)	**Rp 7,900,000**	Rp 550,000
Office Furniture Package (desk, chair, filing cabinet)	**Rp 6,500,000**	Rp 450,000
Built-in Toilet (WC, washbasin, exhaust fan)	**Rp 12,500,000**	Rp 650,000
Extra Window + Security Grille	**Rp 2,750,000**	Rp 150,000
2,200 VA Power Upgrade + Extra Power Outlets	**Rp 2,400,000**	Rp 150,000
2-Camera CCTV + Alarm	**Rp 3,600,000**	Rp 300,000
Wood-Grain Vinyl Flooring	**Rp 3,200,000**	—
Custom Paint Color + Company Logo	**Rp 4,250,000**	—
Concrete Pedestal (per piece)	**Rp 500,000**	—
Steel Stairs & Balcony	**Rp 15,000,000**	—
2-Door Steel Cabinet (per piece)	**Rp 3,500,000**	—
4-Drawer Filing Cabinet (per piece)	**Rp 3,500,000**	—

Excludes 11% VAT & delivery. Prices may change without notice. Final prices are stated in our official quotation.

© Site Office Container 40 Feet · Copyright registered with DGIP Indonesia, No. 000289812

VIEW ONLINE
www.containermodifikasi.co.id/en/catalog/kantor-container-40ft

GALLERY

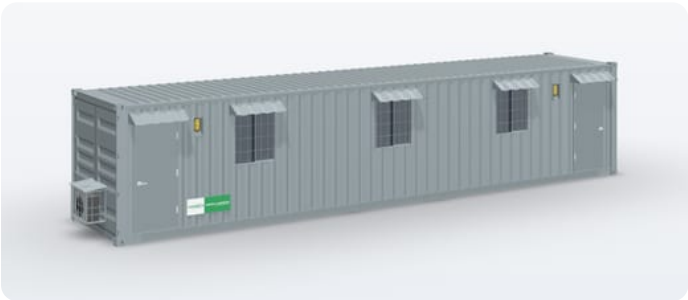

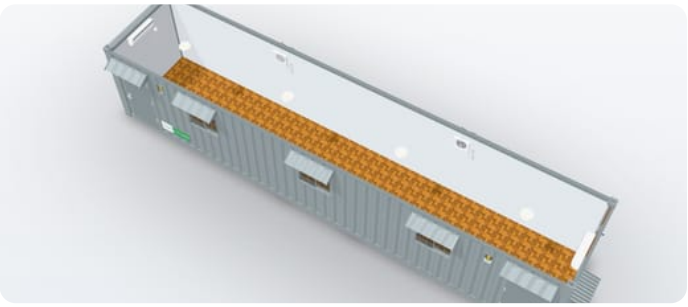

Excludes 11% VAT & delivery. Prices may change without notice. Final prices are stated in our official quotation.

© Site Office Container 40 Feet · Copyright registered with DGIP Indonesia, No. 000289812

VIEW ONLINE
www.containermodifikasi.co.id/en/catalog/kantor-container-40ft